WARRANTY CARD

V-Turbo

SUBMERSIBLE PUMPSET

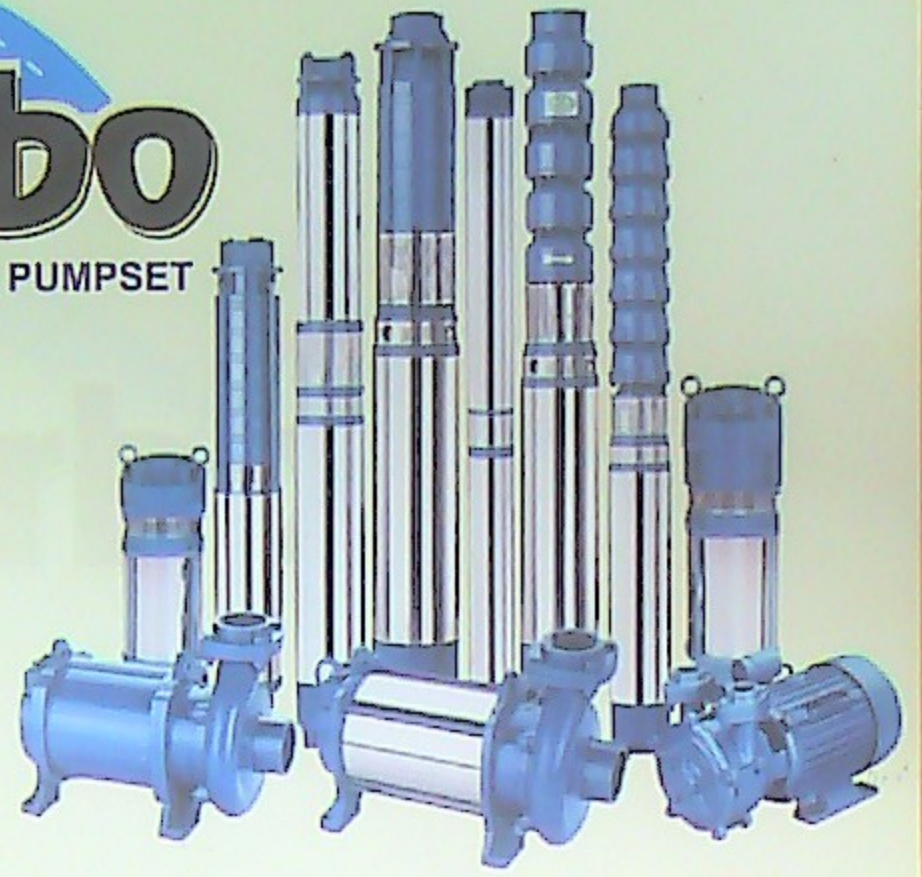

Best Quality & More Water

IS : 8034

CM/L : 3869786

Mfrd. By : Ahmedebad, India.

WARRANTY - TERMS AND CONDITIONS

Warranty Only :- Rotor Stamping One Time Service with in one Year

No Warranty For :- Winding Wire, Silt, Sand Rock, Rotor Bush Baring Set & Pump

SPECIAL FEATURES & ADVANTAGES

Space : It requires very small space, does not require foundation or pump house.

Investment Cost : Due to compact & sturdy design, the initial investment is low.

Installation & Maintenance Cost : The installation cost is very low, can be installed in difficult site in narrow & slanting borewells. Due to proper selection of material & due to high accuracy maintained during production maintenance cost is very low. The operation of pump is noiseless.

Efficiency : Due to efficient design the pump gives higher out put at lower power consumption

V-Turbo

THE MOTOR

1. Motors are squirrel cage type totally enclosed, wet type induction motor suitable for 3 Phase, 415 volts, 50c/s a.c., supply, filled with pure drinking water.
2. Dual seals and sand guards are provided for protection and contamination of outside borewell water.
3. Starters made of seamless pipe with brass end lamination and M.S. ring welded.
4. Starters & Rotors are impregnated in varnish under vacuum and baked, under controlled temperature to avoid rusting in water.
5. Stainless steel sleeves are shrink fitted at bearing locations on rotor shaft & ground to closer tolerance for smooth running.
6. Winding wire is made from water resistance P.V.C. coated copper wire.
7. Rotor assembly is dynamically balanced for vibration free operation.
8. Rotor bars are of electrolytic grade copper.
9. All the bush bearings are water lubricated.
10. Thrust bearing assembly is fitted with tilted pads resting on S.S balls and supported by location pin to take the higher axial load.
11. The revolving thrust plate is made from bronze & fitted with ferrobestos securely fixed to the bronze plate.
12. Rubber diaphragm is provided at the base of the motor to equalise pressure changes caused by variation in temperature during operation.
13. Lead cables are protected with rubber gromets with brass ring.

THE PUMP

1. It is vertical multistage centrifugal pmp with either radial flow a mixed flow type bronze impeller.
2. Impellers are dynamically balanced.
3. All the stationary parts are closed grained graded CI with smooth profiles without any deterimentol defects.
4. All the Bearing Bush are self water lubricated type.
5. The Pumpshaft Sleeves & Coupling are manufactured from Stainless Steel.
6. Impeller & sleeves are securely fixed on S.S. Shaft with S.S. Key.
7. The bowls are locked by bolting to avail high Concentric accuracy & better reliability.
8. A stream lined non return provided to prevent reverse rotation of pump assembly while switched off.
9. Brass or S.S. Suction strainer is provided to avoid entry of suspended material in water.
10. To protect cable from being wearing out during installation, cable guards are provided all along the pump body.

Agriculture : Tubewell Irrigation, Openwell Irrigation River/Canal Irrigation, Sprinkler Irrigation

Public Utilities : Rural Water Supply, Urban Water Supply Domestic Water Supply

Industries : Service Water Supply, Process & Cooling Water Circulation, Fire Fighting Services, Raw & Treated Water Services., Mining & Construction Sites, Booster Application, Ornamental Like Fountains

NO GUARANTY FOR SHILT & WINDING

Name : For GANESH ENTERPRISES

Proprietor

H.P : 12.5 Stage : 25

Serial No. : 9810

Date of Purchase :

WARRANTY CA

V-Turbo

SUBMERSIBLE PUMPSET

Best Quality & More Water

Mfrd. By : Ahmedebad, India.

WARRANTY - TERMS AND CONDITIONS

Warranty Only :- Rotor Stamping One Time Service with in one Year

No Warranty For :- Winding Wire, Silt, Sand Rock, Rotor Bush Baring Set & Pump

Pumpset

Mobile : 97509 10913

V-Turbo

& ADVANTAGES

...ery small space, does not require foundation or pump house
...ue to compact & sturdy design, the initial investment is low
...ressing Cost. The installation cost is very low, can be installed in difficult site in narrow & slanting borewells
...uction of material & due to high accuracy maintained during production maintenance cost is very low. The
...is noiseless.
...efficient design the pump gives higher out put at lower power consumption

THE PUMP

1. It is vertical multistage centrifugal pmp with either radial flow a mixed flow type brorize impeller
2. Impellers are dynamically balanced.
3. All the stationary parts are closed grained graded CI with smooth profiles without any detrimental defects.
4. All the Bearing Bush are self water lubricated type.
5. The Pumpshaft Sleeves & Coupling are manufactured from Stainless Steel
6. Impeller & sleeves are securely fixed on S.S. Shaft with S.S. Key
7. The bowls are locked by bolting to avail high Concentric accuracy & better reliability.
8. A stream lined non return provided to prevent reverse rotation of pump assembly while switched off
9. Brass or S.S. Suction strainer is provided to avoid entry of suspended material in water
10. To protect cable from being wearing out during installation, cable guards are provided all along the pump body.

...are squirrel cage type totally enclosed, wet type induction ...suitable for 3 Phase, 415 volts, 50c/s a.c. supply, filled with ...drinking water.
...ads and pond mounts are provided for protection and ...protection of outside borewell water.
...rs made of seamless pipe with brass end lamination and ...ring welded
...ors & Rotors are impregnated in varnish under vacuum and ...ed, under controlled temperature to avoid rusting in water.
...nless steel sleeves are shrink fitted at bearing locations on ...r shaft & ground to closer tolerance for smooth running
...inding wire is made from water resistance PVC coated copper ...e
...tor assembly is dynamically balanced for vibration free ...eration
...otor bars are of electrolytic grade copper.
...All the bush bearings are water lubricated.
...Thrust bearing assembly is fitted with tilted pads resting on S.S balls and supported by location pin to take the higher axial load.
...The revolving thrust plate is made from bronze & fitted with ferrobestos securely fixed to the bronze plate.
...Rubber diaphragm is provided at the base of the motor to equalise pressure changes caused by variation in temperature during operation.
...Lead cables are protected with rubber grommets with brass ring

Agriculture	Tubewell Irrigation, Openwell Irrigation River/Canal Irrigation, Sprinkler Irrigation Rural Water Supply, Urban Water Supply
Public Utilities	Domestic Water Supply
Industries	Service Water Supply, Process & Cooling Water Circulation., Fire Fighting Services, Raw & Treated Water Services., Mining & Construction Sites., Booster Application, Ornamental Like Fountains.

NO GUARANTY FOR SHILT & WINDING

...me : For GANESH ENTERPRISES
Proprietor

H.P : 10 Stage : 2-S
Serial No. : 8991
Date of Purchase :

Open Well Submersible Monobloc Pump

S PISTON PUMPS

other products

- ...sible Monobloc Pump
- ...ad Pump
- ...ssor Pumpset
- ...ump
- ...cating Pump (Piston Pump)
- Pumpset

SUGUNA

SUGUNA PUMPS & MOTORS

ELECTRIC MOTOR /
MACHINE TOOL FOR POLISHING / BUFFING
DENTAL LATHE
MONOBLOC PUMP

WARRANTY CERTIFICATE

Sl. No. 1982

SUGUNA INDUSTRIES
(An IS/ISO 9001-2015 Certified Company)
SF No. 409, Kalapatti Road, Civil Aerodrome Post,
COIMBATORE - 641 014.
Mobile : 97509 10913

TEXMO INDUSTRIES
Since 1956

Taro

SNO68137009655
TRS 4313-RR + TS056-RR DO

WARRANTY

MTH Road, G.N. Mills Post, Coimbatore - 641 029 | Phone : 0422 - 6610300 | Customer Care : 18001028888 (Tollfree) | E-mail : customersupport@taropumps.com

TEXMO INDUSTRIES offers a conditional free repair service for the pump set purchased through Texmo Industries and its authorized dealers subject to following terms and conditions.

1. Warranty shall be entertained only by the dealer who originally sold the product, **Original purchase bill should accompany the pump set** at the **time of service** failing which the free service offer shall not be applicable.
2. **The number of free service is limited to two within the warranty period of two years. In case two free services have already been claimed before the completion of warranty period, the free service offer ceases to exist.**
3. The pump set should have been installed by Texmo Industries authorized dealer or skilled mechanics only. The pump set should have been installed, operated and maintained in accordance to Texmo Industries product specific installation and operation manual.
4. The free service offer can be availed only at Texmo Industries authorized service outlets and is not applicable for any services done by unauthorized service personnel.
5. The scope of warranty shall extend only to repairing or replacing of defective parts free of cost. The decision as to whether a part should be repaired or replaced is at the sole discretion of Texmo Industries.
6. In case of replacement of part/parts, the defective part/parts shall become property of Texmo Industries.
7. Any expenses incurred in connection with deputing service personnel and technicians including conveyance and other incidentals are to be borne by Customer.
8. All disputes arising out of this warranty shall be referred to Courts having jurisdiction in Coimbatore and no claim shall be made against the company outside Coimbatore notwithstanding that the pump set/motor may have been purchased anywhere in India.

CNZ119